



IM2000

2000 WATT 12V INVERTER



Battery lugs with 110cm lead

“The IM2000 inverter combines all the features you need to power appliances that make caravanning more enjoyable such as microwaves, toasters, bar fridges and televisions.”

FEATURES

Peak Power Technology

Heavy duty MOSFET transistors and a high output transformer allow the inverter to power maximum loads from start up.

Superior Noise Free Filtering

All Projecta inverters have EMC filtering and large electrolytic capacitors for smoother power delivery so your TV, radio, DVD, computers, etc, run as though they are on mains power.

Twin 240V Power Outlets

Any combination of sockets can be used, provided the combined load does not exceed the inverter's rating.

Low Battery Voltage Protection

To protect your battery from permanent damage caused by a deep discharge, the IM2000 has a low battery warning buzzer and shut off.

Thermostatically Controlled Cooling Fan

A built in cooling fan ensures that the inverter continues to provide reliable power for longer periods when under heavy loads.

Internally Bonded Earth System


All Projecta inverters have an internally bonded earth system. This ensures that in the event of a 240V appliance failing, the inverter will immediately shut down, preventing any chance of electrocution.

Mounting Brackets

Allows the inverter to be easily mounted.

SPECIFICATIONS

PART NO.	IM2000
INPUT	12V DC, 240A Max
OUTPUT	230/240V AC 50Hz (Modified Sine Wave)
OUTPUT POWER	2000W Continuous (4000W Peak)
IDEAL BATTERY SIZE	85–400Ah
MINIMUM BATTERY SIZE	85Ah, 600CCA
RUN TIME WITH 2000W ON 85Ah BATTERY	5 min
RUN TIME WITH 100W GLOBE ON 85Ah BATTERY	7 hours
APPROVALS	Electrical Safety, EMC

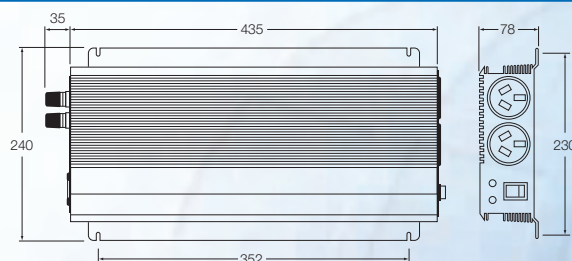

Accessories

IWK6	3m, 49mm ² (0 B&S) wiring kit
IFB-250	Fuse box with 250A ANL fuse
IF-250	250A ANL fuse